



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 7/00	A2	(11) International Publication Number: WO 00/51365 (43) International Publication Date: 31 August 2000 (31.08.00)
(21) International Application Number: PCT/SE00/00177 (22) International Filing Date: 28 January 2000 (28.01.00) (30) Priority Data: 09/258,977 26 February 1999 (26.02.99) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: SAWYER, François; 1895 Megantic, St-Hubert, Quebec J3Y 7H7 (CA). (74) Agent: NORIN, Klas; Ericsson Radio Systems AB, Common Patent Department, S-164 80 Stockholm (SE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: GEOGRAPHICAL INFORMATION FOR LOCATION-BASED SERVICES (57) Abstract <p>A method of providing subscriber location information to a radio telecommunication network (10) and an integrated communication network which integrates the radio telecommunication network with at least one wireline communication network. When a subscriber utilizes a mobile station (11) to access the radio telecommunication network, a radio base station (RBS) (13) sends to a mobile switching center (MSC) (15), a cell identity of the cell (12) in which the registration is received from the mobile station. The cell identity is converted in a cell/coordinate (25) table to a range of geographic coordinates that approximate the coverage area of the cell. The geographic coordinates are then sent from the MSC to the radio telecommunication network or to a gateway (23) for the integrated communication network in a network access message. The coordinates may replace or supplement cell-related information in the network access message.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

GEOGRAPHICAL INFORMATION FOR LOCATION-BASED SERVICES

BACKGROUND OF THE INVENTION

5

Technical Field of the Invention

This invention relates to telecommunication systems and, more particularly, to a method of providing geographical information to telecommunications networks for implementing location-based services.

10

Description of Related Art

As telecommunications technology evolves, it is anticipated that telecommunications networks such as cellular radio networks, data networks, the Public Switched Telephone Network (PSTN), and the Internet, etc., which today are distinct and separate networks, will be integrated into one communications network. Different access technology will enable subscribers to access the integrated network via different access methods such as by radio link, copper pair, coax cable, etc. Once access has been made, the integrated network will use a common communications protocol. It is only the access technology which is distinct for each access method that a subscriber may utilize to access the network.

15

20

Cellular radio telecommunications networks have long dealt with issues concerning the mobility of subscribers and the ability of the network to keep track of mobile stations as subscribers roam from area to area. In addition, cellular networks have implemented location-based services that utilize a Cell-ID (the identification of the cell that is serving the mobile station) to enable or disable certain services that are location-dependent. In addition, cellular networks have traditionally based their charges at least partially on the location of the mobile station.

25

Other types of networks that have traditionally not been concerned with the mobility of subscribers are now beginning to define mobility in their networks. For example, the Internet Engineering Task Force (IETF) is currently studying ways for a subscriber to travel with a personal computer (PC) and connect it to a local area

30

-2-

network (LAN) in another city, and have messages automatically forwarded to the subscriber's Internet Protocol (IP) address when he logs on. This requires that the subscriber's location be sent to the subscriber's Internet Service Provider (ISP) upon system access. Likewise, the subscriber may connect a wireless access device to his PC and access the network via a radio link. When he does so, the cell that is serving the geographical area where the subscriber is located will report its Cell-ID to the serving mobile switching center (MSC). In existing cellular networks, the MSC utilizes on this Cell-ID to designate the location of the mobile subscriber. However, the Internet, or any other integrated communications network, will not understand and cannot utilize the reported cell information. Therefore, there is a need to implement the capability to handle mobile subscribers in networks that have traditionally handled only non-mobile or "fixed" subscribers. This capability must be implemented without using cell-related information which has traditionally been utilized in cellular radio telecommunications networks.

Although there are no known prior art teachings of a solution to the aforementioned deficiency and shortcoming such as that disclosed herein, U.S. Patent No. 5,208,756 to Song (Song), U.S. Patent No. 5,218,367 to Sheffer et al. (Sheffer), U.S. Patent No. 5,602,903 to LeBlanc et al. (LeBlanc), and U.S. Patent No. 5,657,487 to Doner (Doner) discuss subject matter that bears some relation to matters discussed herein. Each of these patents disclose methods of geographically locating a mobile station by analyzing signal strength information received in a plurality of cells in a cellular telecommunications network. These methods may be utilized to automate one of the steps in the method of the present invention, and each of these patents is hereby incorporated by reference in their entirety herein.

Review of each of the foregoing references reveals no disclosure or suggestion of a method such as that described and claimed herein. It would be advantageous to have a method of providing subscriber location information to networks that have traditionally handled only fixed subscribers. This location information would be provided in a format that is usable by all networks, and provides the networks with the information needed to handle mobile subscribers and provide location-based services. The present invention provides such a method.

-3-

SUMMARY OF THE INVENTION

In one aspect, the present invention is a method of providing subscriber location information to an ANSI-41 radio telecommunication network in which the subscriber utilizes a mobile station to access the network. A radio base station (RBS) sends to a mobile switching center (MSC), a cell identity of a cell in which a registration is received from the mobile station. The cell identity is converted in a cell/coordinate table to a range of geographic coordinates that approximate the coverage area of the cell. Preferably, both the cell identity and the geographic coordinates are then sent from the MSC to the network in a network access message. Alternatively, only the geographic coordinates are sent.

In another aspect, the present invention is a method of providing subscriber location information to a Global System for Mobile Communications (GSM) radio telecommunication network in which the subscriber utilizes a mobile station to access the network. A radio base station (RBS) sends to a base station controller (BSC), a cell identity of a cell in which a registration is received from the mobile station. The cell identity is converted in a cell/coordinate table to a range of geographic coordinates that approximate the coverage area of the cell. The coordinates are then sent to a mobile switching center (MSC). The MSC then sends a network access message to the network and preferably includes both the cell identity and the geographic coordinates in the message. Alternatively, only the geographic coordinates are sent.

In yet another aspect, the present invention is a method of providing subscriber location information from a radio telecommunication network to an integrated communication network which integrates the radio telecommunication network with at least one wireline communication network. The method includes the steps of interfacing the radio telecommunication network and the wireline communication network with a gateway, determining geographical coordinates of the subscriber's location, inserting the geographical coordinates in a network access message, and sending the network access message from the radio telecommunication network to the gateway.

-4-

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the following drawings, in conjunction with the accompanying specification, in which:

5 FIG. 1 is a simplified block diagram of an ANSI-41 cellular telecommunications network modified in accordance with the teachings of the present invention;

10 FIG. 2 is a simplified block diagram of a Global System for Mobile Communications (GSM) cellular telecommunications network modified in accordance with the teachings of the present invention; and

FIG. 3 is an illustrative example of a portion of a cell/coordinate table utilized in the method of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

15 FIG. 1 is a simplified block diagram of an ANSI-41 cellular telecommunications network 10 modified in accordance with the teachings of the present invention. A mobile station 11 is shown operating within the cell coverage area 12 of a radio base station (RBS) 13. When the mobile station registers, a Cell-ID 14 is sent to a serving mobile switching center (MSC) 15 over an interface 16 which
20 may be implemented in accordance with IS-634 or a proprietary interface. Within the MSC is Radio Network Controller (RNC) software 17 and Mobile Switching Center (MSC) software 18. The RNC software processes the registration and sends the Cell-ID or a location area identity (LocArea-ID) to the MSC software for the location where the registration was received. A location area is a group of cells within which the
25 mobile station may roam from cell to cell without having to re-register.

The MSC 15 interfaces with the rest of the service network 19 utilizing the ANSI-41 intersystem signaling protocol 21. The MSC sends a Registration Notification (REGNOT) Invoke message or a location updating message to the HLR
30 22. This message normally includes the Cell-ID or the LocArea-ID along with a MSC identity (MSCID). The HLR functions to provide radio network access, and is capable of recognizing cells or groups of cells. The service network may also include various

-5-

gateways 23 connecting to other networks, and a message center 24.

The RNC software 17 interfaces with the radio access part of the network, and handles radio access on a cell basis. Therefore the RNC software recognizes and utilizes cell-related identities such as Cell-IDs and LocArea-IDs. The present invention adds a cell/coordinate table 25 to the MSC 15. The cell/coordinate table converts Cell-IDs and LocArea-IDs to sets of latitude and longitude coordinates. The coordinates are then passed to the MSC software 18, and the coordinates are included in the ANSI-41 messages sent from the MSC to other nodes in the service network. Since some nodes in the service network such as the HLR 22 are currently programmed to recognize Cell-IDs and LocArea-IDs, the preferred embodiment of the present invention includes Cell-IDs and LocArea-IDs in the ANSI-41 messages as well.

Thus, the present invention distinguishes between the use of cell-related information for radio access and the use of geographic coordinates for location information in the rest of the network. The Cell-ID or LocArea-ID is converted to latitude and longitude coordinates in the MSC, between the RNC software 17 and the MSC software 18. The MSC software interfaces with the service network 19, and other networks through the gateways 23, therefore it is advantageous for the MSC software to use coordinates. When the registration message is sent from the MSC 15 to the HLR 22, the ANSI-41 message may include both cell-related information and coordinate information. Messages addressed to gateways or other nodes that do not recognize cell-related information may include only coordinate information.

The present invention is also applicable to networks implemented according to the Global System for Mobile Communications (GSM) standards. FIG. 2 is a simplified block diagram of a GSM cellular telecommunications network 30 modified in accordance with the teachings of the present invention. A mobile station 31 is shown operating within the cell coverage area 32 of a radio base station (RBS) 33, also referred to as a Base Transceiver Station (BTS). The RBS detects a registration from the mobile station, and sends Cell-ID information 34 to a base station controller (BSC) 35 over an Abis interface 36. The BSC is separate from the MSC 37 in GSM networks, and there is an A-interface 38 between the BSC and the MSC. Radio

-6-

Network Controller (RNC) software 39 is implemented within the BSC 35 while MSC software 40 is implemented within the MSC 37.

The RNC software 39 interfaces with the radio access part of the network, and handles radio access on a cell basis. Therefore the RNC software recognizes and utilizes cell-related identities such as Cell-IDs. In GSM networks, the cell/coordinate table 25 may be implemented in the BSC 35. The cell/coordinate table converts Cell-IDs and LocArea-IDs to sets of latitude and longitude coordinates. The coordinates are then passed to the MSC software 40 over the A-interface 38. The MSC software adds the coordinates to messages sent from the MSC to other nodes in the service network. The coordinates may either replace the cell-related information in the messages, or the coordinates may be placed in the messages in addition to the cell-related information.

The MSC communicates with a Visitor Location Register (VLR) 41 over a Mobile Application Part (MAP) interface 42. The MSC typically sends a MSC identity (MSCID), a LocArea-ID, and the coordinates to the VLR. The VLR sends the MSCID, a VLR number, and the coordinates to the rest of the service network 43 and the HLR 44. The service network may also include various gateways 45 connecting to other networks, and a message center 46.

FIG. 3 is an illustrative example of a portion of the cell/coordinate table 25 utilized in the method of the present invention. The RNC software may be modified to include the table of cells and latitude and longitude coordinates that are associated with each cell. Each cell may be associated with a range of latitude coordinates and a range of longitude coordinates since an exact location is not needed for providing a location-based service. If the MS is operating in a location area comprising several cells, the table combines the latitude and longitude ranges of each cell in the location area to determine a latitude and longitude range of the entire location area. Alternatively, the cell/coordinate table may be populated with the coordinates of the RBS which is currently serving the mobile station, particularly if the cells are very small (e.g., picocells). Even for larger cells, the coordinates of the RBS are sufficient for many services which need only the general area where the mobile station is located.

Coordinate data may be entered into the cell/coordinate table 25 manually by

-7-

the system operator. Generally, once the data is entered for the cells in a particular MSC, the data does not change unless cell planning calls for the addition of a new base station which not only adds a new cell, but may also decrease the size of neighboring cells. Alternatively, the process of entering coordinates may be automated. A number
5 of prior art references are available which teach methods of determining cell boundaries and locating mobile stations within them. U.S. Patent No. 5,208,756 to Song, U.S. Patent No. 5,218,367 to Sheffer et al., U.S. Patent No. 5,602,903 to LeBlanc et al., and U.S. Patent No. 5,657,487 to Doner disclose methods of geographically locating a mobile station by analyzing signal strength information
10 received in a plurality of cells in a cellular telecommunications network. Each of these patents is hereby incorporated by reference in their entirety herein.

The coordinate information from the cell/coordinate table 25 is added to the interfaces between the BSC and the MSC, and between the MSC and the rest of the radio network. The cell-related information may be dropped from interfaces between
15 the radio network and other networks that have no use for this information. Adding coordinates to the interfaces enables, for example, an Internet service provider to determine a subscriber's geographic location when the subscriber logs on. In this way, the subscriber may still automatically download E-mail messages when he logs on, even though he is far from home. ISPs would, of course, have the option of charging
20 an extra fee for delivery of messages when the subscriber is in a remote location rather than his home location. By way of additional example, a mobile subscriber may place a data call to a hotel chain's database to find the nearest hotel to his location. The call may be connected to the hotel database which utilizes the coordinates of the mobile station to determine the nearest hotel.

25 It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method shown and described has been characterized as being preferred, it will be readily apparent that various changes and modifications could be made therein without departing from the scope of the invention as defined in the following claims.

30

-8-

WHAT IS CLAIMED IS:

1. A method of providing subscriber location information to a communication network comprising the steps of:

5 determining geographical coordinates of a subscriber's location; and
inserting the geographical coordinates in a network access message sent from the subscriber to the network.

2. The method of providing subscriber location information of claim 1
10 wherein the communication network is an ANSI-41 radio telecommunication network, and the subscriber utilizes a mobile station to access the network, wherein the step of determining the geographical coordinates of the subscriber's location includes the steps of:

15 sending, from a radio base station to a mobile switching center (MSC), a cell identity of a cell in which a registration is received from the mobile station; and
converting, in a cell/coordinate table in the MSC, the cell identity to geographic coordinates for the cell.

3. The method of providing subscriber location information of claim 2
20 wherein the step of converting, in a cell/coordinate table, the cell identity to geographic coordinates for the cell includes determining a range of latitude and longitude coordinates that approximate the coverage area of the cell.

4. The method of providing subscriber location information of claim 1
25 wherein the communication network is an ANSI-41 radio telecommunication network, and the subscriber utilizes a mobile station to access the network, wherein the step of determining the geographical coordinates of the subscriber's location includes the steps of:

30 sending, from a radio base station to a mobile switching center (MSC), a cell identity for a cell in which a registration is received from the mobile station;
determining in the MSC, a location area identity for a location area which

-9-

includes the cell; and

converting, in a cell/coordinate table in the MSC, the location area identity to geographic coordinates for the location area.

5 5. The method of providing subscriber location information of claim 4 wherein the step of converting, in a cell/coordinate table, the location area identity to geographic coordinates for the location area includes determining a range of latitude and longitude coordinates that approximate the coverage areas of a plurality of cells contained in the location area.

10

 6. The method of providing subscriber location information of claim 4 wherein the step of converting, in a cell/coordinate table, the location area identity to geographic coordinates for the location area includes determining latitude and longitude coordinates for each radio base station that serves a cell contained in the
15 location area.

 7. The method of providing subscriber location information of claim 1 wherein the communication network is an ANSI-41 radio telecommunication network, and the subscriber utilizes a mobile station to access the network through a radio base
20 station (RBS), wherein the step of inserting the geographical coordinates in a network access message sent from the subscriber to the network includes:

 sending, from the RBS to a mobile switching center (MSC), a cell identity of a cell in which a registration is received from the mobile station; and

 sending both the cell identity and the geographic coordinates from the MSC to
25 the network in the network access message.

 8. The method of providing subscriber location information of claim 1 wherein the communication network is an ANSI-41 radio telecommunication network, and the subscriber utilizes a mobile station to access the network through a
30 radio base station (RBS), wherein the step of inserting the geographical coordinates in a network access message sent from the subscriber to the network includes:

-10-

5 sending, from the RBS to a mobile switching center (MSC), a cell identity of
a cell in which a registration is received from the mobile station;
replacing the cell identity with an associated set of geographic coordinates; and
sending the geographic coordinates from the MSC to the network in the
network access message.

9. The method of providing subscriber location information of claim 1
wherein the communication network is a Global System for Mobile Communications
(GSM) radio telecommunication network, and the subscriber utilizes a mobile station
10 to access the network, wherein the step of determining the geographical coordinates
of the subscriber's location includes the steps of:

15 sending, from a radio base station to a base station controller (BSC), a cell
identity of a cell in which a registration is received from the mobile station; and
converting, in a cell/coordinate table in the BSC, the cell identity to geographic
coordinates for the cell.

10. The method of providing subscriber location information of claim 1
wherein the communication network is a Global System for Mobile Communications
(GSM) radio telecommunication network, and the subscriber utilizes a mobile station
20 to access the network, wherein the step of determining the geographical coordinates
of the subscriber's location includes the steps of:

25 sending, from a radio base station to a base station controller (BSC), a cell
identity for a cell in which a registration is received from the mobile station;
determining in the BSC, a location area identity of a location area which
includes the cell; and
30 converting, in a cell/coordinate table in the BSC, the location area identity to
geographic coordinates for the location area.

11. The method of providing subscriber location information of claim 1
30 wherein the communication network is a Global System for Mobile Communications
(GSM) radio telecommunication network, and the subscriber utilizes a mobile station

-11-

to access the network through a radio base station (RBS), wherein the step of inserting the geographical coordinates in a network access message sent from the subscriber to the network includes:

- 5 sending, from the RBS to a base station controller (BSC), a cell identity of a cell in which a registration is received from the mobile station; determining the geographic coordinates for the identified cell in the BSC;
- 10 sending the geographic coordinates from the BSC to a mobile switching center (MSC); and
- 10 sending the geographic coordinates from the MSC to the network in the network access message.

12. A method of providing subscriber location information to an ANSI-41 radio telecommunication network in which the subscriber utilizes a mobile station to access the network, said method comprising the steps of:

- 15 sending, from a radio base station (RBS) to a mobile switching center (MSC), a cell identity of a cell in which a registration is received from the mobile station;
- converting, in a cell/coordinate table, the cell identity to a range of geographic coordinates that approximate the coverage area of the cell; and
- 20 sending both the cell identity and the geographic coordinates from the MSC to the network in a network access message.

13. A method of providing subscriber location information from a radio telecommunication network to an integrated communication network which integrates the radio telecommunication network with at least one wireline communication network, said method comprising the steps of:

- 25 interfacing the radio telecommunication network and the wireline communication network with a gateway;
- determining, in the radio telecommunication network, geographical coordinates of the subscriber's location;
- 30 inserting the geographical coordinates in a network access message; and
- sending the network access message from the radio telecommunication

-12-

network to the gateway.

14. The method of providing subscriber location information from a radio telecommunication network to an integrated communication network of claim 13
5 wherein the step of determining geographical coordinates of the subscriber's location includes the steps of:

sending, from a radio base station (RBS) to a block of radio network control (RNC) software, a cell identity of a cell in which a registration is received from the mobile station;

10 determining by the RNC software, a location area identity for a location area which includes the cell; and

converting, in a cell/coordinate table, the location area identity to geographic coordinates for the location area.

15 15. The method of providing subscriber location information from a radio telecommunication network to an integrated communication network of claim 14 wherein the step of inserting the geographical coordinates in a network access message includes inserting both the location area identity and the geographic coordinates in the network access message.

20

16. The method of providing subscriber location information from a radio telecommunication network to an integrated communication network of claim 14 wherein the step of inserting the geographical coordinates in a network access message includes replacing the location area identity with the geographic coordinates in the
25 network access message.

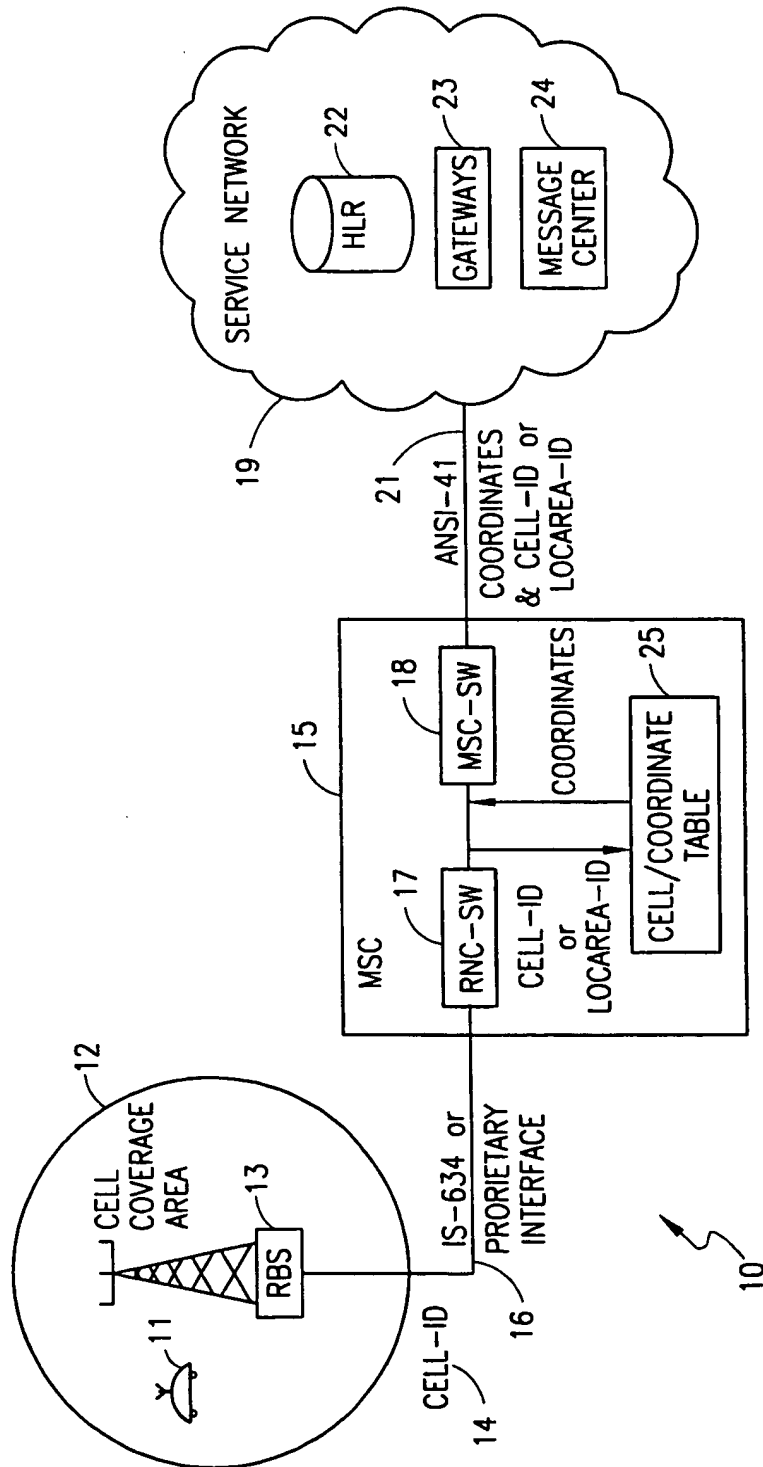


FIG. 1

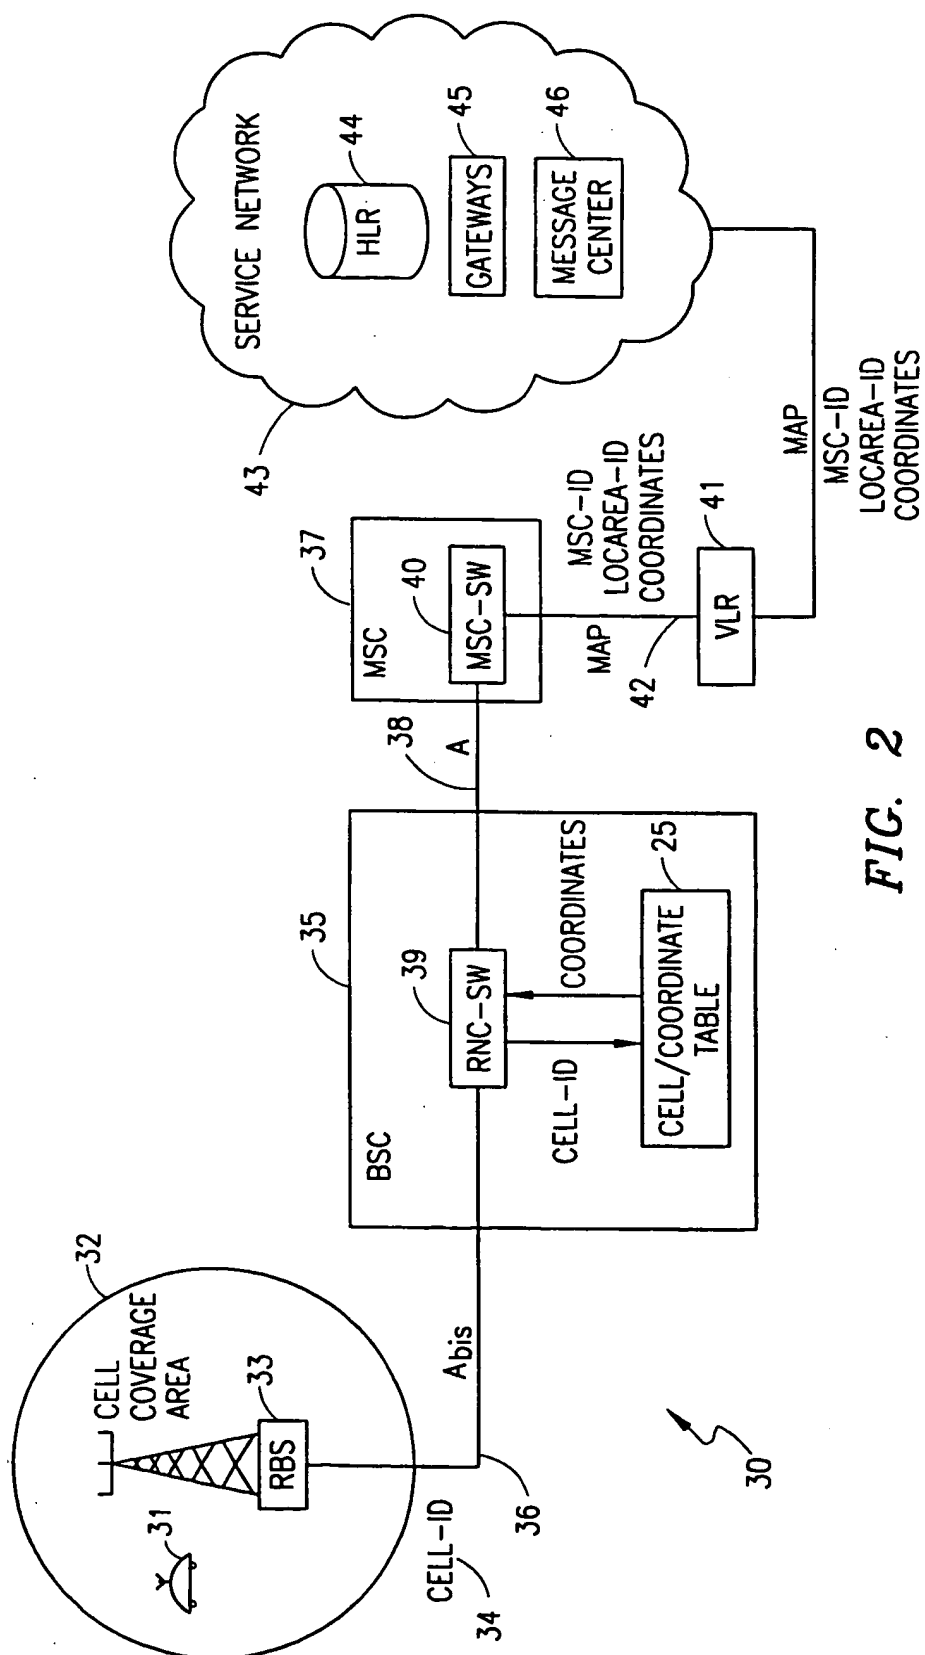


FIG. 2

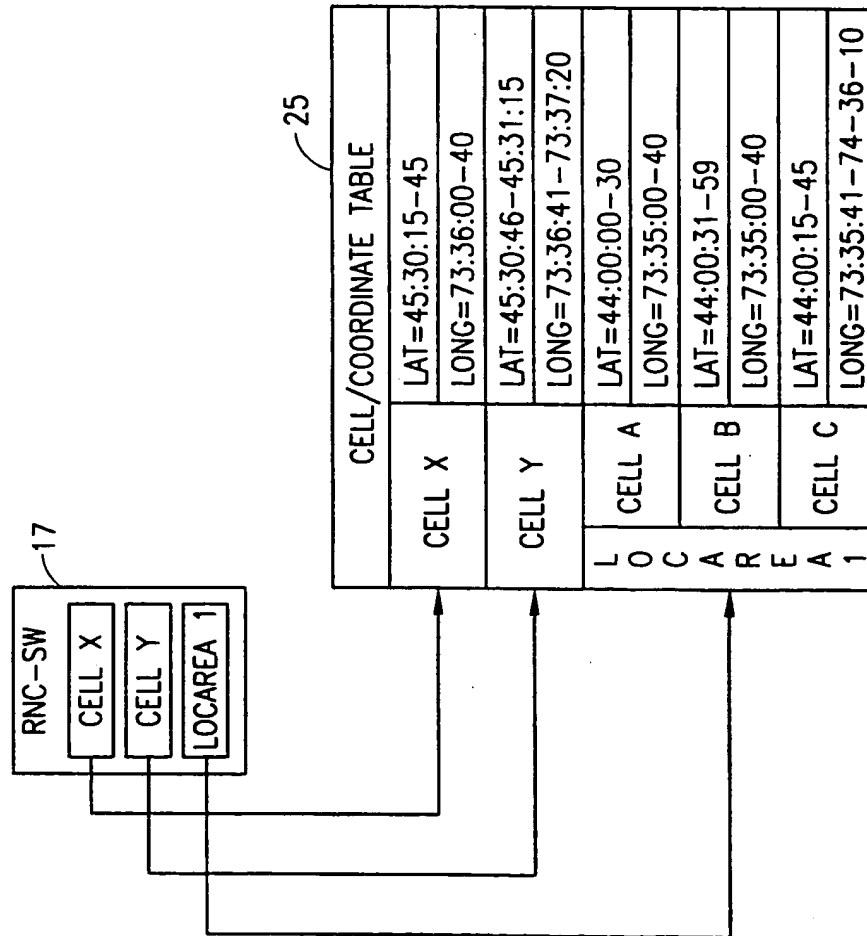


FIG. 3

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 August 2000 (31.08.2000)

PCT

(10) International Publication Number
WO 00/51365 A3

(51) International Patent Classification⁷: H04Q 7/38

(21) International Application Number: PCT/SE00/00177

(22) International Filing Date: 28 January 2000 (28.01.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/258.977 26 February 1999 (26.02.1999) US

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

Published:
— With international search report.


(72) Inventor: SAWYER, François; 1895 Megantic, St-Hubert, Quebec J3Y 7H7 (CA).

(88) Date of publication of the international search report:
7 December 2000

(74) Agent: NORIN, Klas; Ericsson Radio Systems AB, Common Patent Department, S-164 80 Stockholm (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: GEOGRAPHICAL INFORMATION FOR LOCATION-BASED SERVICES

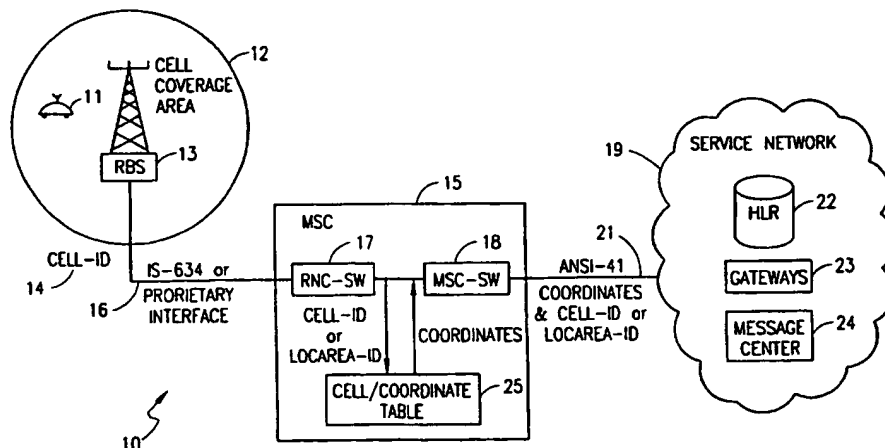

(57) Abstract: A method of providing subscriber location information to a radio telecommunication network (10) and an integrated communication network which integrates the radio telecommunication network with at least one wireline communication network. When a subscriber utilizes a mobile station (11) to access the radio telecommunication network, a radio base station (RBS) (13) sends to a mobile switching center (MSC) (15), a cell identity of the cell (12) in which the registration is received from the mobile station. The cell identity is converted in a cell/coordinate (25) table to a range of geographic coordinates that approximate the coverage area of the cell. The geographic coordinates are then sent from the MSC to the radio telecommunication network or to a gateway (23) for the integrated communication network in a network access message. The coordinates may replace or supplement cell-related information in the network access message.

WO 00/51365 A3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00177

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98/16076 A1 (AT & T WIRELESS SERVICES, INC.), 16 April 1998 (16.04.98), page 1, line 6 - page 2, line 17; page 9, line 9 - line 19; page 11, line 16 - page 12, line 9 --	1-16
X	US 5519760 A (DANIEL G. BORKOWSKI ET AL), 21 May 1996 (21.05.96), column 4, line 16 - line 31; column 9, line 31 - line 52, abstract --	1-16
A	EP 0783235 A2 (AT & T CORP.), 9 July 1997 (09.07.97), column 1, line 52 - column 2, line 11 --	1-16

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 10 August 2000	Date of mailing of the international search report 13. 09. 2000
Name and mailing address of the International Searching Authority European Patent Office P.O. 5818 Patentlaan 2 NL-2280 HV Rijswijk Tel: (+31-70)340-2040, Tx 31 651 epo nl, Fax: (+31-70)340-3018	Authorized officer Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00177

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99/05877 A1 (MOTOROLA INC.), 4 February 1999 (04.02.99), claims 1-3, abstract -- -----	1-16

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/SE 00/00177

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 98/16076 A1	16/04/98	NONE	
US 5519760 A	21/05/96	CA 2169955 A EP 0714589 A JP 9502333 T WO 9535636 A	28/12/95 05/06/96 04/03/97 28/12/95
EP 0783235 A2	09/07/97	JP 9200836 A US 5740538 A	31/07/97 14/04/98
WO 99/05877 A1	04/02/99	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.